

Remote Controller


IR Dimming Control for ML7550-V1/2 Series (UP / Down / Min / Max / On-Off)

Features

- Simple & Light and suitable for stand-alone LED lighting
- Universal operation for ML7550-V1 / ML7550-V2A Series
- Holder for easy keeping
- Soft Button and comfortable grip
- DMX512 Addressable and Grouping by 10 Dip switches
- Customized Logo available



Specifications


Configuration	Key	Function
 <p>Remote Controller (P/N: 5Key_LXT)</p>	POWER	Power On/Off
	UP	Dimming Up (Step)
	DOWN	Dimming Down (Step)
	MIN	Dimming to Minimum
	MAX	Dimming to Maximum
	Standard Remote Controller: Material: Plastic Color: All Black Battery Type: AAA x 2ea Standard IR Sensor Assy: Cable: Shield Connector: 3P	
DIMMING STEP (7 steps)		
OFF(0), 8%, 15%, 25%, 40%, 54%, 75%, 100%		

Image



Dimension (mm)

Weight:60g

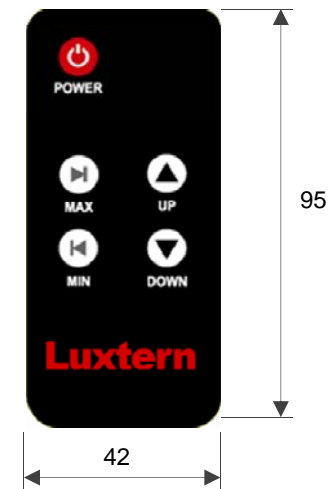

CAUTION

- 1) Be sure to install main AC switch for an emergency in case of remote controller lost
- 2) When power OFF and ON by AC main switch or remote controller, dimming level goes to maximum.
- 3) Do NOT use two or more IR sensor in order to control multiplex lighting units in a room, it may caused signal entangled.